


**HaydonKerk Motion Solutions™ has designed an advanced series of drivers to efficiently operate motors to their peak performance. With several options to select from, we can help you set up a system that will power-up any application.**

## Micro Stepping Drives #DCM8028 & DCM8055

HaydonKerk Motion Solutions™ High Performance Micro Stepping Chopper Drives based on some of the most advanced technology in the world today. Providing a cost effective solution for production volume requirements, the small size allows designers to use these Drives in limited space and they are also easily integrated with other electronic systems. Design time is reduced because incorporating these Drives is far simpler than developing a custom drive circuit. They are suitable for driving 2-phase step motors (maximum current ratings of 2.8 A and 5.5 A rms per phase). These specially designed Drives deliver optimum performance throughout a greater speed range. By using an advanced bipolar constant-current chopping technique, and a maximum input voltage of 80 VDC, they can produce more speed and power from the same motor, compared with traditional technologies such as L/R drives.

The DCM8028 and DCM8055 feature high performance, low cost, compact size, mixed decay current control for less motor heating, automatic idle-current reduction and micro step resolutions from 1/2 step to 1/256. There are fourteen micro step resolutions selectable in decimal and binary. The output current levels and micro step resolutions are easily set via the 8 bit DIP switch. These Drives are suitable for 4, 6, and 8 lead motors.

Ideal for a wide range of stepping motors such as low voltage linear motors, used in various kinds of machines, such as X-Y tables, labeling machines, laser cutters, engraving machines, and pick-place devices. These Drives are particularly useful in motor applications requiring low noise, low vibration, high speed and high precision requirements.

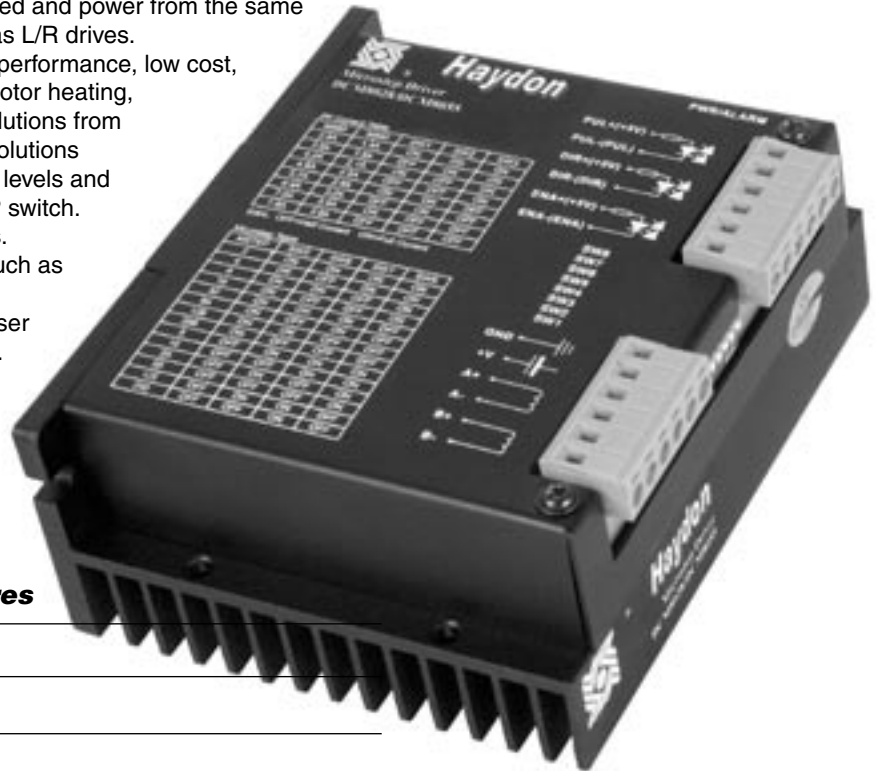

### Drive DCM8028/DCM8055 Drive Features

- User friendly Chopper Drive
- Ideal for a wide range of stepping motors
- Suitable for 4, 6, 8 lead motors
- Inaudible 20 khz chopping frequency
- TTL compatible and optically isolated input signals
- 14 selectable microstep resolutions in decimal and binary
- Current up to 5.5 A rms/phase
- Automatic idle current reduction
- 4 5/16" x 4" x 1 1/8" (11.0 cm x 10.2 cm x 2.9 cm)
- Up to 80 VDC input voltage. For Europe the maximum input voltage must be limited to 70 VDC (CE Regulations)

## Bipolar Chopper Drive #DCS4020

The Haydon™ DCS4020 Chopper Drive by HaydonKerk Motion Solutions™ delivers optimum performance throughout a greater speed range. This new technology drive has been designed for easy set up and use. The Haydon DCS4020 is ideal for development projects where a single power supply is all that is necessary to easily run the motor. The motor current is set using an on-board potentiometer and no external current setting resistors are required.

The DCS4020 is also feature-packed. The Driver provides all the basic motor controls including full or half-stepping of bipolar steppers, directional control, and output enable control. An oscillator circuit is standard on the drive with an on-board speed control potentiometer. In addition, external input/output signals allow complete remote control of all drive functions. All electrical connectors have removable plugs incorporating screw type terminals.



### Bipolar Chopper Drive #DCS4020 Features

- On-board or external step pulse clock
- On-board or external single step switch
- On-board or external step rate control potentiometer
- On-board or external direction control
- On-board or external full step / half step control
- On-board or external outputs enable control
- On-board current control potentiometer

### Bipolar Chopper Drive #DCS4020 Technical Data

<b>Size:</b>	4.47-in x 3.38-in x 1.31-in (113.54 mm x 85.85 mm x 33.27 mm)
<b>Power Requirement:</b>	Single unregulated, providing +20 VDC to +40 VDC
<b>Output Current:</b>	Fully adjustable from 66 mA rms/Ø to 2 A rms/Ø continuous duty
<b>Continuous rating:</b>	2 A rms/Ø
<b>Peak, non-repetitive rating:</b>	3 A/Ø
<b>Chopper Frequency:</b>	~20 KHz
<b>Onboard Oscillating Range:</b>	<10 pulses/sec. to >2,000 pulses/sec.
<b>Stepping:</b>	Full step/Half step capability
<b>I.C.s:</b>	<b>S.T. Micro: L297</b> (control I.C.) and <b>L298</b> (4A dual full wave bridge)

